



## Description

The XT3N20VU TVS diode is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebooks, and PDA's. It offers superior electrical characteristics such as low clamping voltage, low leakage current and high surge capability. It is designed to protect sensitive electronic components which are connected to power lines, from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning.

The XT3N20VU is in a DFN2020-3L package and will protect one unidirectional line. It may be used to provide ESD protection up to  $\pm 30\text{kV}$  (Contact and air discharge) according to IEC61000-4-2 , and withstand peak pulse current up to 160A (8/20 $\mu\text{s}$ ) according to IEC61000-4-5.

<http://www.xihangsemi.com>

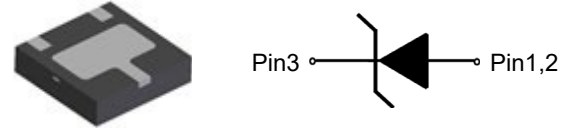


## Pin Configuration (Top View)

## Features

- ◆ Working voltage: 20V
- ◆ DFN2020-3L Package
- ◆ 6000 Watts peak pulse power ( $t_p=8/20\mu\text{s}$ )
- ◆ Transient protection for data lines to  
IEC 61000-4-2 (ESD)  $\pm 30\text{kV}$  (air),  
 $\pm 30\text{kV}$  (contact)  
IEC 61000-4-5 (Surge) 160A (8/20 $\mu\text{s}$ )  
IEC61000-4-4(EFT) 40A(5/50ns)
- ◆ Low leakage current
- ◆ Low clamping voltage
- ◆ Solid-state silicon-avalanche technology

## Applications

- ◆ Power lines
- ◆ Personal digital assistants (PDA's)
- ◆ Microprocessors based equipment
- ◆ Notebooks, Desktops, and Servers
- ◆ Cell phone Handsets and Accessories
- ◆ Portable Electronics
- ◆ Peripherals




## Marking

## Order Information

Device	Package	Shipping
XT3N20VU	DFN2020-3L	3000/Tape&Reel

## Definitions of electrical characteristics

Symbol	Parameter
$V_{RWM}$	Reverse Stand-off Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Reverse Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$
$C_j$	Junction Capacitance
$I_{PP}$	Peak Pulse Current

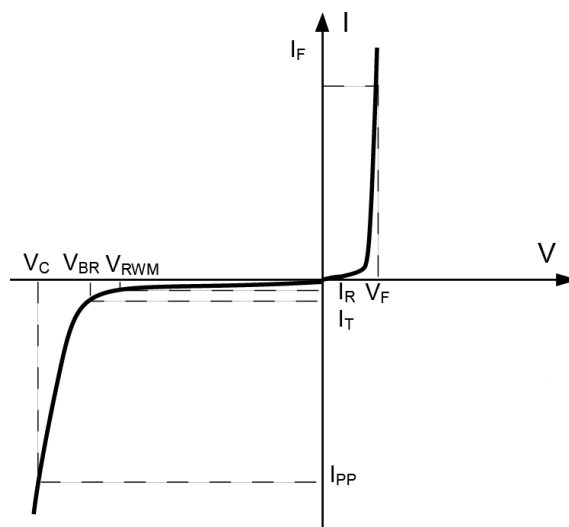

## Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_P = 8/20\mu S$ )	$P_{PK}$	4000	W
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 30$	kV
ESD according to IEC61000-4-2 contact discharge		$\pm 30$	kV
Peak Pulse Current	$I_{PP}$	160	A
Lead Soldering Temperature	$T_L$	260 (10 sec)	$^{\circ}C$
Operating Temperature	$T_{OP}$	-55 to +125	$^{\circ}C$
Storage Temperature	$T_{STG}$	-55 to +150	$^{\circ}C$


## Electrical Characteristics ( $T_a=25^{\circ}C$ , unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	$V_{RWM}$				20	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	21	23	25	V
Reverse Leakage Current	$I_R$	$V_{RWM}=20V$			1	$\mu A$
Clamping Voltage <sup>1)</sup>	$V_C$	$I_{PP}=60A$ $t_P = 8/20\mu s$		35	40	V
		$I_{PP}=130A$ $t_P = 8/20\mu s$		43	47	V
		$I_{PP}=160A$ $t_P = 8/20\mu s$		48	55	V
Junction Capacitance	$C_j$	$V_R=0V$ $f = 1MHz$	300	400	500	pF


Notes:

1)Non-repetitive current pulse, according to IEC61000-4-5.


## Typical Characteristics (Ta=25°C, unless otherwise noted)

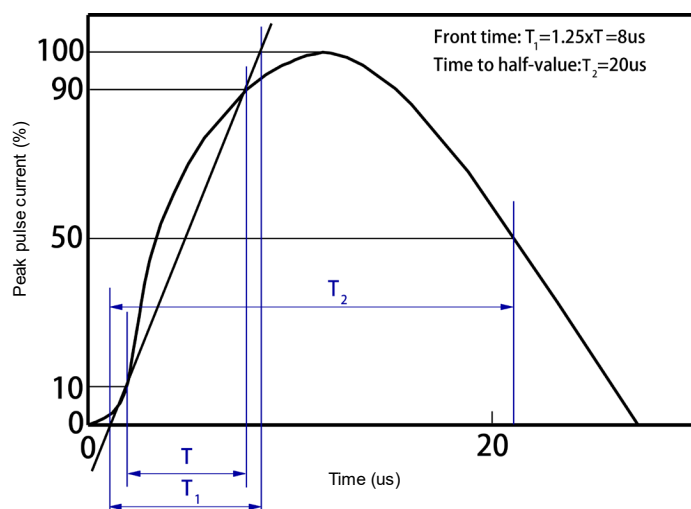


8/20 us waveform per IEC61000-4-5

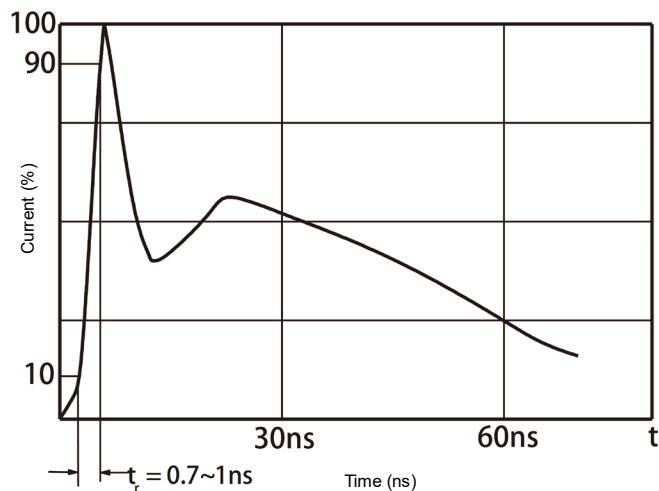

Contact discharge current waveform per IEC61000-4-2

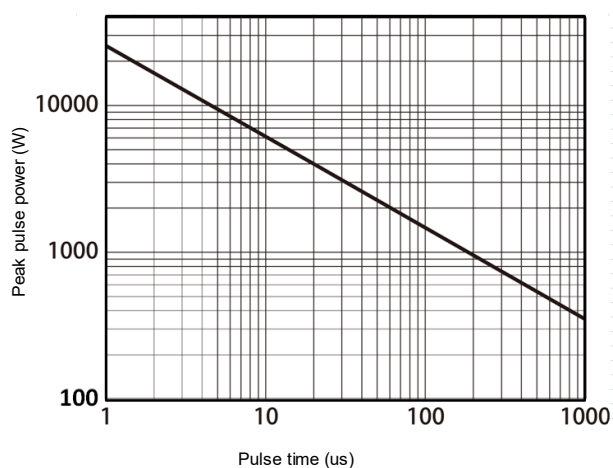


Non-repetitive peak pulse power vs. Pulse time

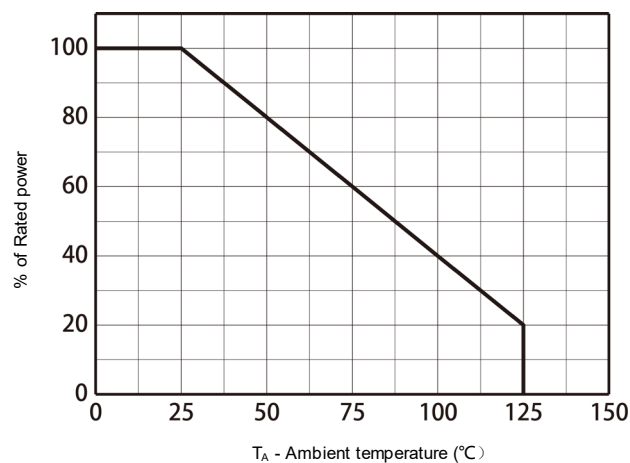


Power derating vs. Ambient temperature

# Package Outline Dimensions (DFN2020-3L)

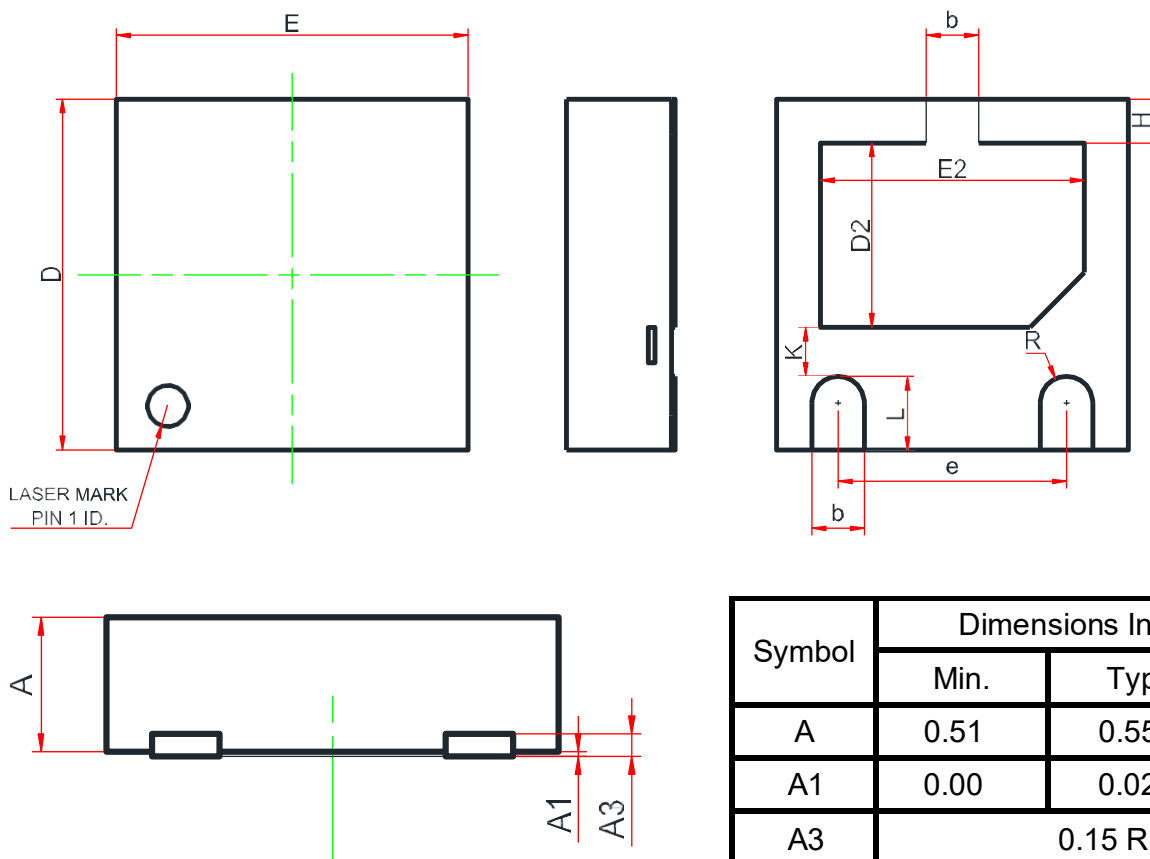**DFN2.0×2.0-3L**


## Recommend Land Pattern (Unit: mm)


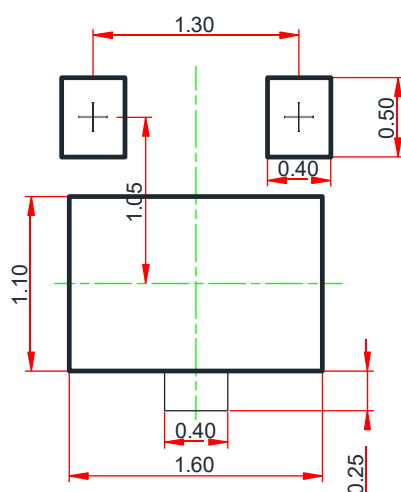


Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.51	0.55	0.60
A1	0.00	0.02	0.05
A3	0.15 REF.		
b	0.25	0.30	0.35
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D2	0.85	1.00	1.10
E2	1.35	1.50	1.60
e	1.20	1.30	1.40
H	0.20	0.25	0.30
K	0.20	0.30	0.40
L	0.35	0.40	0.45
R	0.15	-	-

### Note:

This recommended land pattern is for reference purpose only.

## Load with information

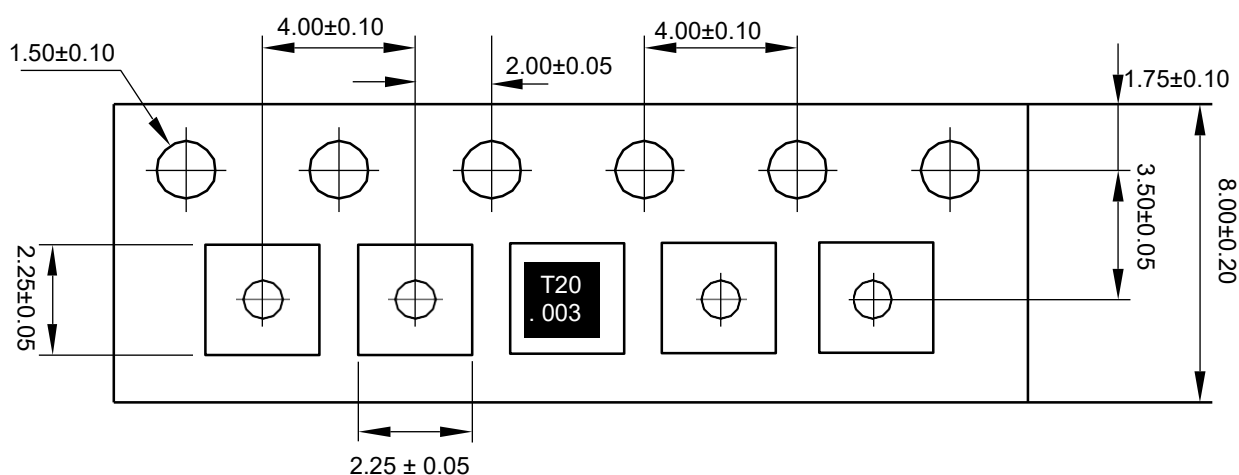

Unit: mm

## NOTICE

XIHANG's products are not authorized for use as components in any life support device or systems.

XIHANG reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. XIHANG does not assume any liability arising out of the application or use of any product described herein.