

Description


The XE2FUC5VB is an ultra-low capacitance ESD protection diode designed to protect sensitive electronic components which are connected to high speed data lines and control lines from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. The XE2FUC5VB may be used to provide ESD protection up to $\pm 20\text{kV}$ (contact) and ± 20 (air) discharge according to IEC61000-4-2, and withstand peak pulse current up to 5A (8/20 μs) according to IEC61000-4-5.

The XE2FUC5VB is available in DFN1006-2L package. Standard products are Pb-free and Halogen-free.


<http://www.xihangsemi.com>



DFN1006-2L (Bottom View)

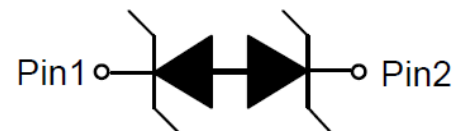

Circuit Diagram



Marking (Top View)

Features

- ◆ Working voltage: 5V
- ◆ DFN1006-2L Package
- ◆ Ultra Low Capacitance: 0.35pF
- ◆ Transient protection for data lines to IEC61000-4-2 (ESD) $\pm 20\text{kV}$ (air), $\pm 20\text{kV}$ (contact)
- ◆ IEC61000-4-5 (Surge) 5A (8/20 μs)
- ◆ IEC61000-4-4(EFT)40A(5/50ns)
- ◆ Low leakage current
- ◆ Low clamping voltage
- ◆ Solid-state silicon-avalanche technology

Applications


- ◆ USB2.0 and USB3.0
- ◆ HDMI1.3 and HDMI1.4
- ◆ SATA and eSATA
- ◆ DVI
- ◆ IEEE1394
- ◆ PCI Express
- ◆ Portable Electronics
- ◆ Notebook

Order Information

Device	Package	Shipping
XE2FUC5VB	DFN1006-2L	10000/Tape&Reel

Definitions of electrical characteristics

Symbol	Parameter
V_{RWM}	Reverse Stand-off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_{BR}	Reverse Breakdown Current
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
I_T	Test current

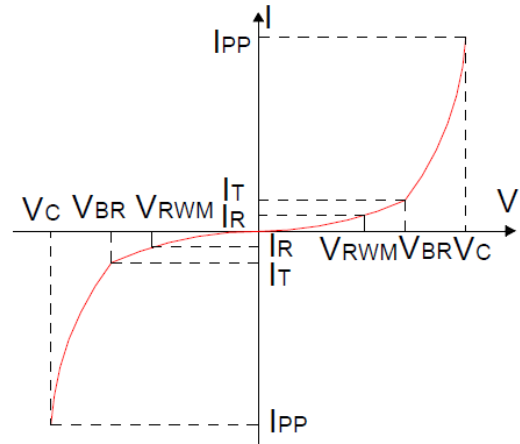

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PK}	100	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{pp}	5	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 20	kV
ESD according to IEC61000-4-2 contact discharge		± 20	kV
Lead Soldering Temperature	T_L	260 (10 sec)	$^{\circ}C$
Operating Temperature	T_{OP}	-55 to +125	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}C$


Electrical Characteristics ($T_a=25^{\circ}C$, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	V_{RWM}				5.0	V
Reverse Leakage Current	I_R	$V_{RWM}=5V$			100	nA
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	7.0	8.4	9.0	V
Clamping Voltage ¹⁾	V_C	$I_{PP}=1A$ $t_p = 8/20\mu s$		10	12.5	V
		$I_{PP}=2.5A$ $t_p = 8/20\mu s$		13	15	V
		$I_{PP}=5A$ $t_p = 8/20\mu s$		24	26	V
Junction Capacitance	C_j	$V_R=0V$ $f = 1MHz$		0.35	0.5	pF


Notes:

1)Non-repetitive current pulse, according to IEC61000-4-5.


Typical Characteristics (Ta=25°C, unless otherwise noted)

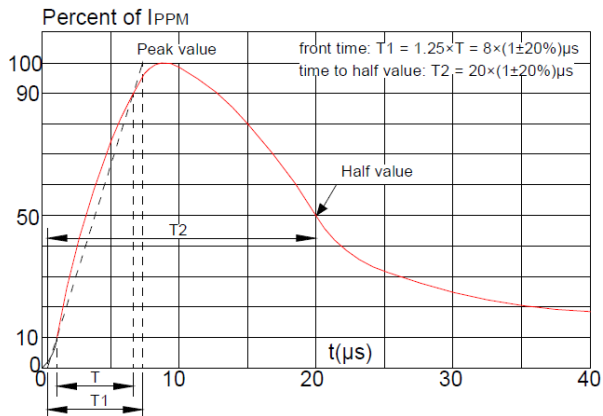


Pulse Waveform (8/20us)

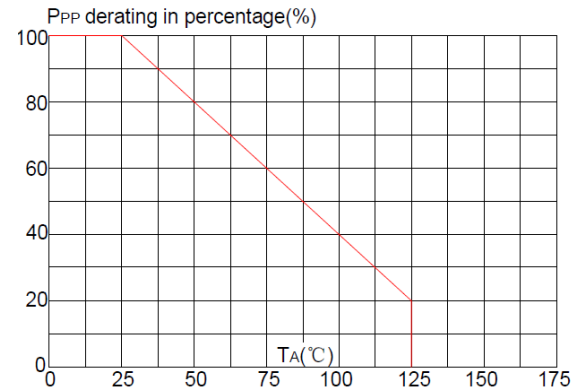


Pulse Derating Curve

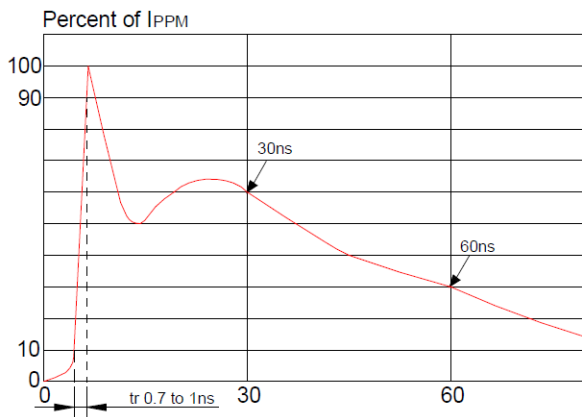

ESD Clamping(8kV Contact Discharge)

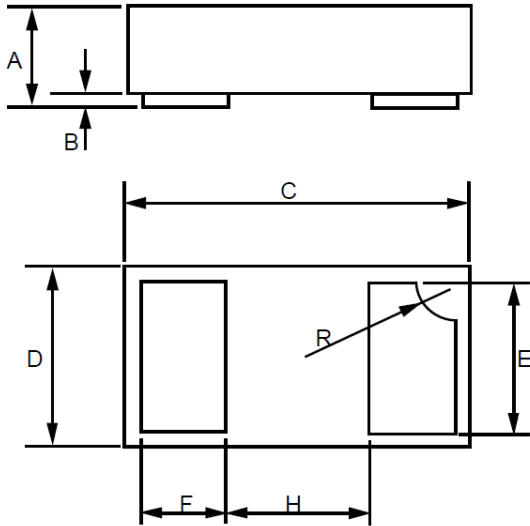Package Outline Dimensions (DFN1006-2L)


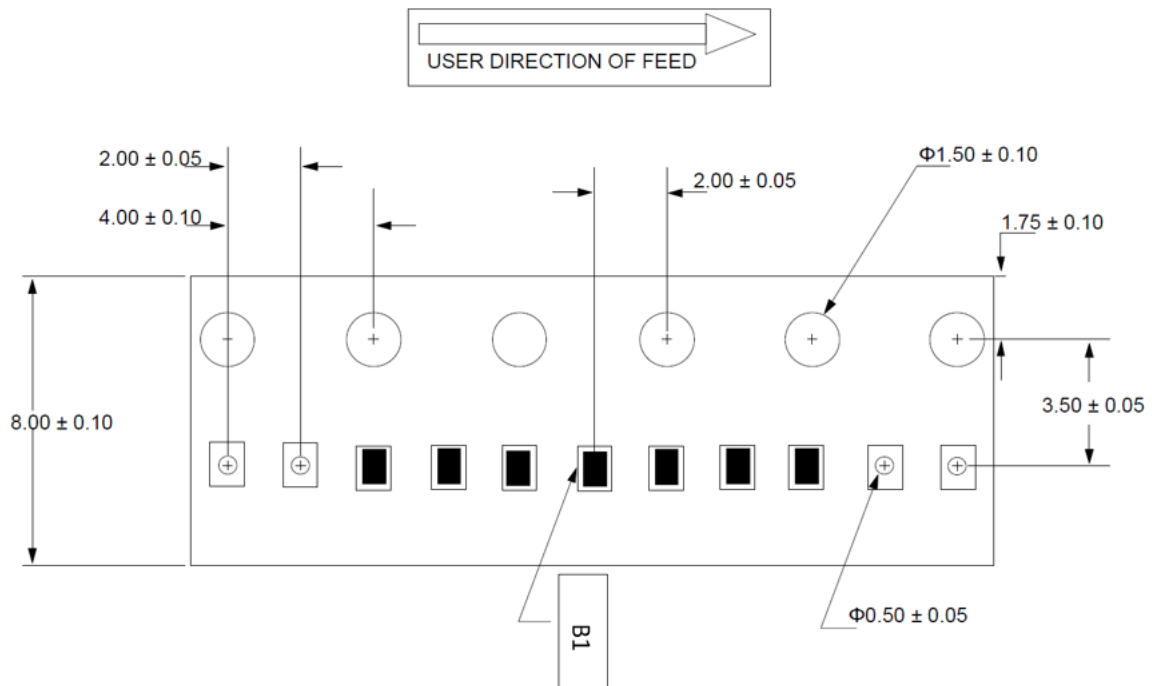
Dim	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.018	0.020	0.46	0.51
B	0.000	0.002	0	0.05
C	0.037	0.041	0.95	1.05
D	0.022	0.025	0.55	0.65
E	0.017	0.021	0.45	0.55
F	0.008	0.012	0.20	0.30
H	0.015Typ.		0.40Typ	
R	0.001	0.005	0.05	0.15

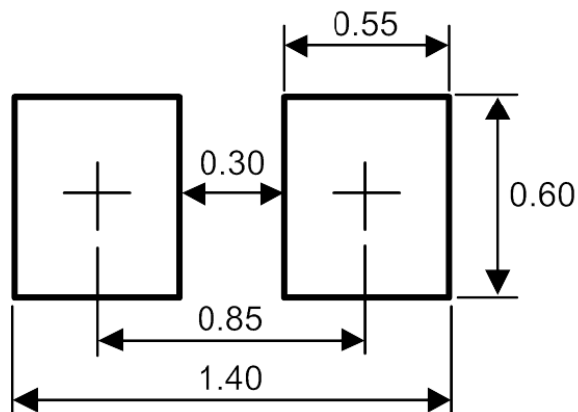Recommend Land Pattern (Unit: mm)


Note:

This recommended land pattern is for reference purpose only.

Load with information



Unit: mm

NOTICE

XIHANG's products are not authorized for use as components in any life support device or systems.

XIHANG reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. XIHANG does not assume any liability arising out of the application or use of any product described herein.