


Description


The XT1DFT24VU TVS diode is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebooks, and PDA's. It offers superior electrical characteristics such as low clamping voltage, low leakage current and high surge capability. It is designed to protect sensitive electronic components which are connected to power lines, from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning.

The XT1DFT24VU is in a SOD-123FLT package and will protect one uni-directional line. It may be used to provide ESD protection up to $\pm 30\text{kV}$ (Contact and air discharge) according to IEC61000-4-2, and withstand peak pulse current up to 200A (8/20 μs) according to IEC61000-4-5.

<http://www.xihangsemi.com>




SOD-123FLT



Circuit Diagram

Features

- ◆ Working voltage: 24V
- ◆ SOD-123FLT Package
- ◆ 6400 Watts peak pulse power ($t_p=8/20\mu\text{s}$)
- ◆ Transient protection for data lines to
IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (air),
 $\pm 30\text{kV}$ (contact)
IEC 61000-4-5 (Surge) 200A (8/20 μs)
IEC61000-4-4(EFT)40A(5/50ns)
- ◆ Low leakage current
- ◆ Low clamping voltage
- ◆ Solid-state silicon-avalanche technology



Marking

Order Information


Device	Package	Shipping
XT1DFT24VU	SOD-123FLT	3000/Tape&Reel

Applications

- ◆ Power lines
- ◆ Personal digital assistants (PDA's)
- ◆ Microprocessors based equipment
- ◆ Notebooks, Desktops, and Servers
- ◆ Cell phone Handsets and Accessories
- ◆ Portable Electronics
- ◆ Peripherals

Definitions of electrical characteristics

Symbol	Parameter
V_{RWM}	Reverse Stand-off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_R	Reverse Breakdown Current
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}

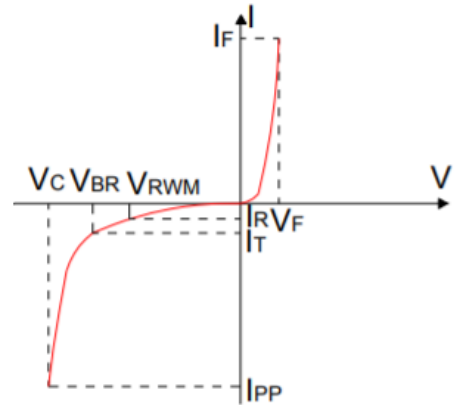





Absolute Maximum Rating


Rating	Symbol	Value	Units
Peak Pulse Power ($t_P = 8/20\mu S$)	P_{PK}	7000	W
Peak Pulse Current ($t_P = 8/20\mu S$)	I_{PP}	200	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	kV
Lead Soldering Temperature	T_L	260 (10 sec)	$^{\circ}C$
Operating Temperature	T_{OP}	-55 to +125	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}C$

Electrical Characteristics ($T_a=25^{\circ}C$, unless otherwise noted)


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	V_{RWM}				24	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	26		30	V
Reverse Leakage Current	I_R	$V_{RWM}=24V$			1	μA
Clamping Voltage	V_C	$I_{PP}=50A \quad t_P = 8/20\mu s$		29	30	V
	V_C	$I_{PP}=150A \quad t_P = 8/20\mu s$		32	34	V
	V_C	$I_{PP}=200A \quad t_P = 8/20\mu s$		35	37	V
Junction Capacitance	C_j	$V_R=0V \quad f = 1MHz$		670	1000	pF

Typical Characteristics ($T_a=25^{\circ}\text{C}$, unless otherwise noted)

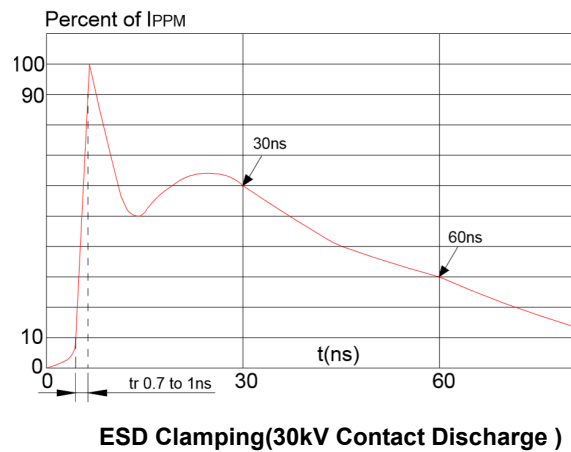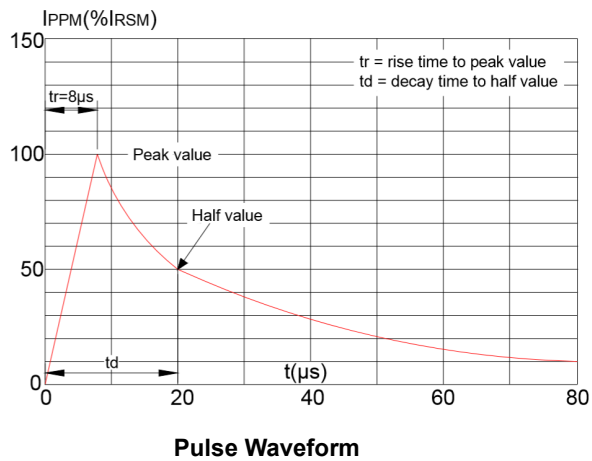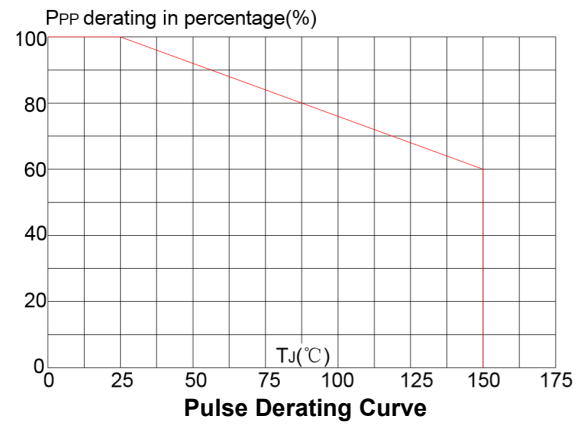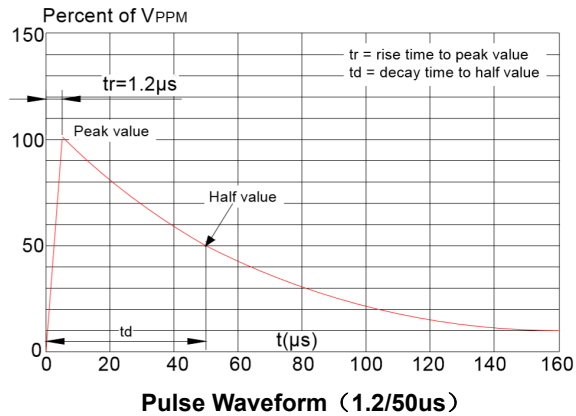

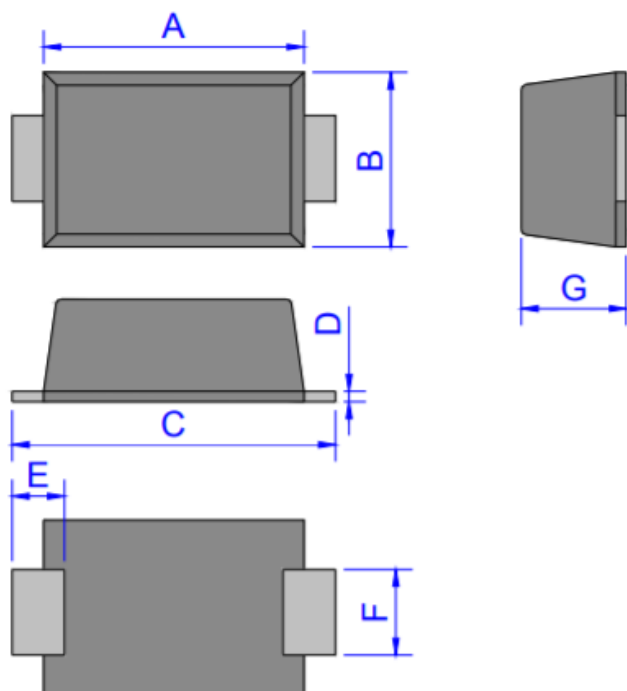Package Outline Dimensions (SOD-123FLT)


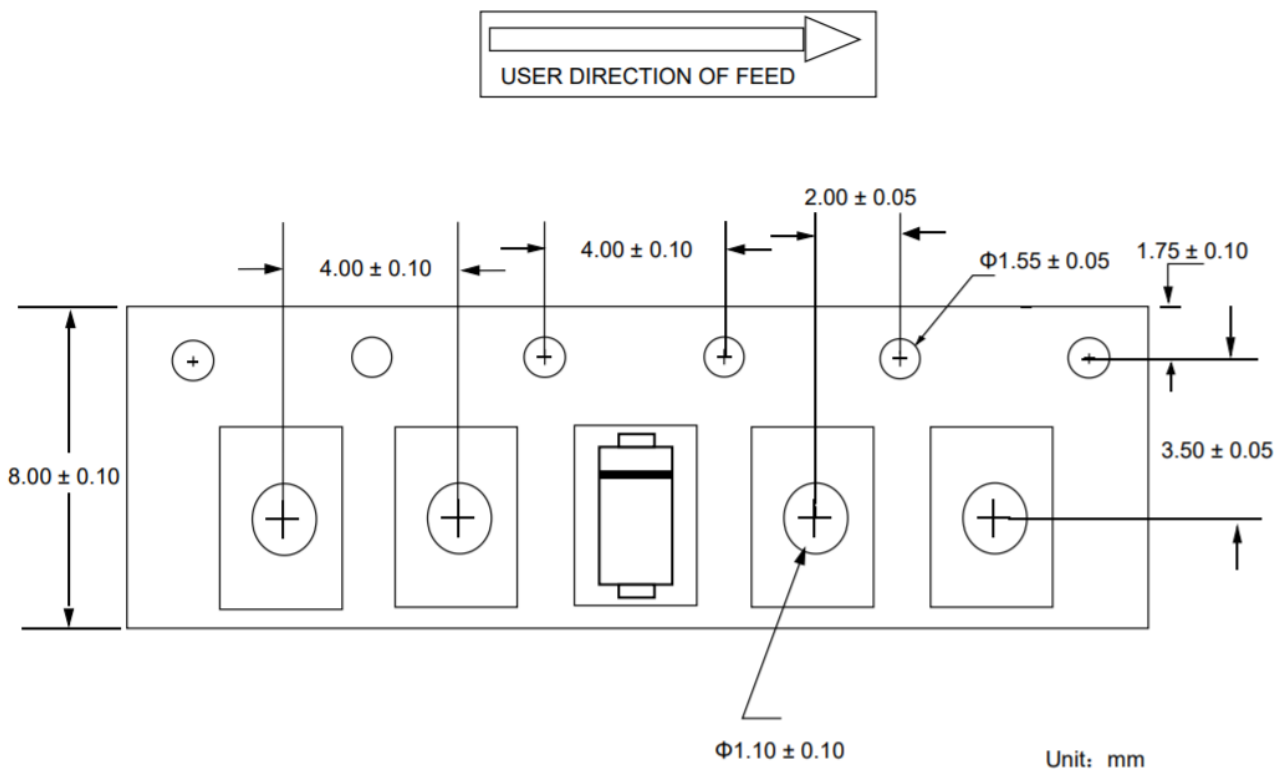
Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.60	3.00	0.102	0.118
B	1.60	2.00	0.063	0.079
C	3.45	3.95	0.136	0.156
D	0.10	0.25	0.004	0.01
E	0.3	0.9	0.012	0.035
F	0.80	1.20	0.031	0.047
G	0.70	1.00	0.028	0.039
J	1.30		0.051	
K		1.70		0.067
L	1.30		0.051	

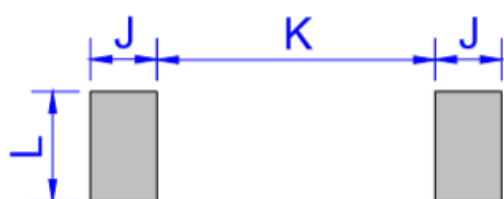Recommend Land Pattern (Unit: mm)


Note:

This recommended land pattern is for reference purpose only.

Load With Information



NOTICE

XIHANG's products are not authorized for use as components in any life support device or systems.

XIHANG reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. XIHANG does not assume any liability arising out of the application or use of any product described herein.